

EAC-CC02-AC0

1.1. Feature

- 基于Intel Skylake-S/Kaby lake-S平台
- 支持6/7/8/9th Gen Intel Core i3/i5/i7处理器
- 双道通DDR4内存设计，最大支持32GB
- 集显最大同时支持2显，独显最大同时支持4显
- MXM3.0标准接口，支持GTX1050/1060/1070等显卡
- 工作温度支持-20~50℃





1.2. Specification


Model		EAC-CC02-AC0
Processor	CPU	Intel Skylake-S / Kaby Lake-S I3/I5/I7
	Socket	Intel® Socket LGA1151
	Chipset	Intel PCH Q170/H110
	BIOS	AMI 64MBit SPI
Memory	Max Capacity	32GB
	Technology	DDR4 2133/2400MHz 1.2V
	Socket	2 x SO-DIMM
Expansion	Mini PCI-E	2 x Mini PCIE for WIFI/BT
	M.2	1 x M.2(2242) for SSD
	mSATA	1 x mSATA3.0 for WIFI/BT
	SIM	2 x SIM
Storage	SATA	2 x SATA3.0 SATA 6Gb/s
Display	Slot	1 x MXM3.1 by PCI-E x16 support Type A/B DP A: Display Port DP B: Display Port DP C: HDMI DP D: Display Port
	Multiple Display	6 Ports
	Front I/O	1 x HDMI1.4a (From CPU) 1 x DP (From GPU)
	Rear I/O	1 x HDMI1.4a (From GPU) 1 x DP (From CPU) 2 x DP (From GPU)
	Max Resolution	HDMI:4096*2160@30Hz DP:4096*2160@60Hz
	Graphics Card	F80 RTX2070 F80 RTX2060S F80 RTX2060

		F73 GTX1660Ti F73 GTX1660S F79 GTX1650 F48 GTX1070m F47 GTX1060m
USB/Type C	Front I/O	4 x USB3.0 Type A
	Rear I/O	2 x USB2.0
	Function	Support wake up from S3/S4
Ethernet	Chipset	Integrated 10/100/1000M Adaption (Realtek RTL8111H)
	Front I/O	3 x RJ45 10/100/1000M (2 x I210 + 1 x I219LM)
	Function	Support wake up and PXE
COM	Rear I/O	2 x DB9
Audio	Chipset	Integrated High Definition Audio Stereo (ALC662)
	Rear I/O	1 x Line Out 1 x MIC In
Other	Operating System	Linux , Windows 7 / 8.1 / 10
	Button	1 x Power Button 1 x Reset Button
Power	Power Supply	1 x Phoenix Port(5P In)
	Adapter	6V~48V, Max 20A
	Consumption	250W
	Standby Power	under 0.5W
Physical	Dimension (L*W*H)	335*222.5*98 mm
	Color	Gray
Environmental Conditions	Operation Temperature	-20°C - 50°C
	Operation Humidity	10%-90% (non-condensing)
	Storage Temperature	-20°C - 70°C
	Storage Humidity	10% - 90%
	Random Operating	0.5g rms/5~500Hz

1.3. Connector

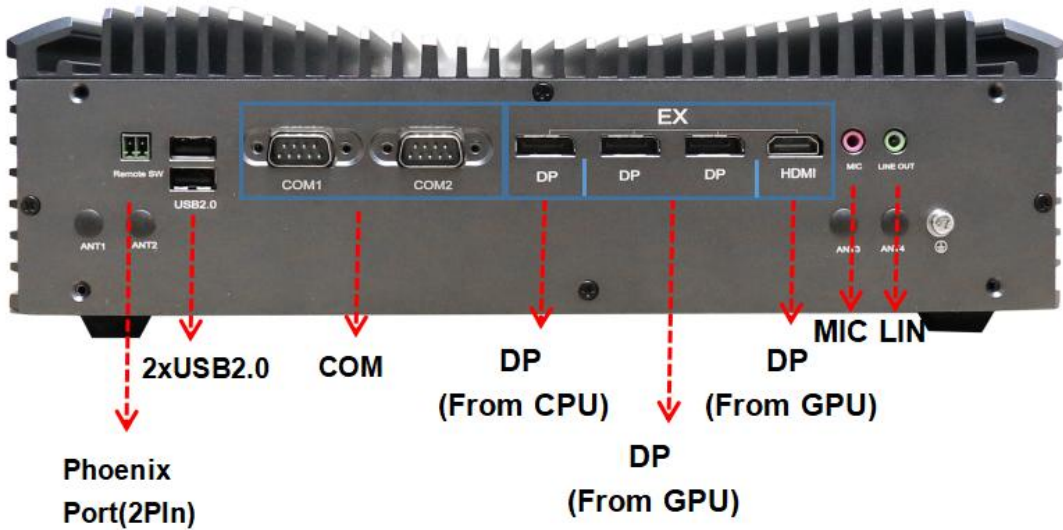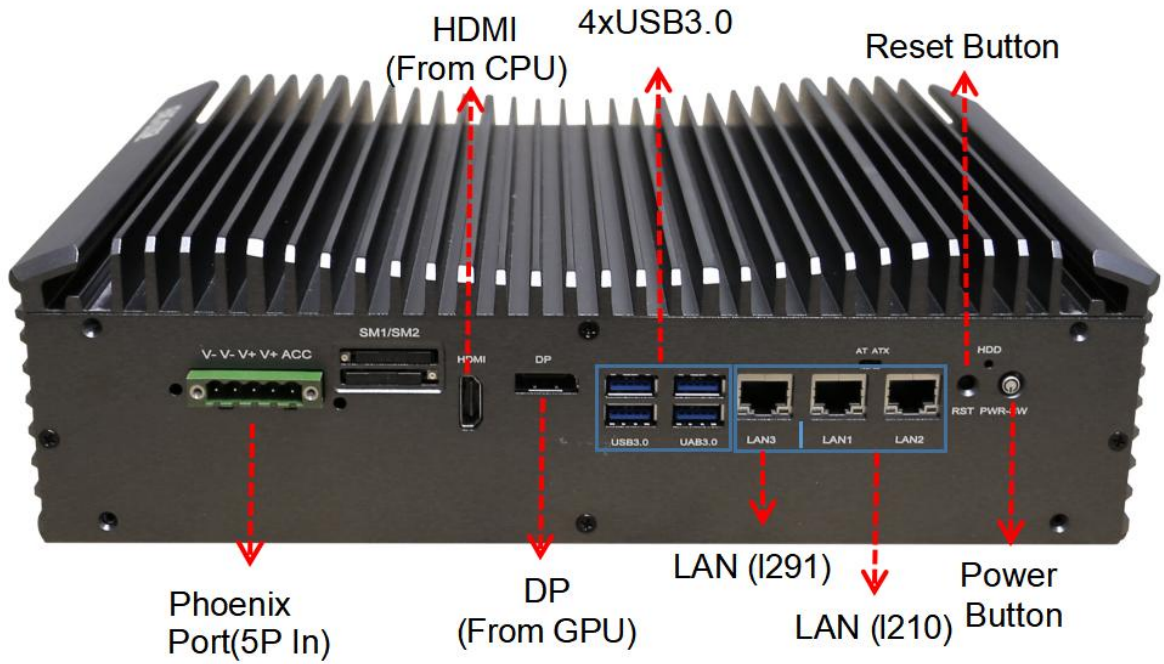

1.4. Connector

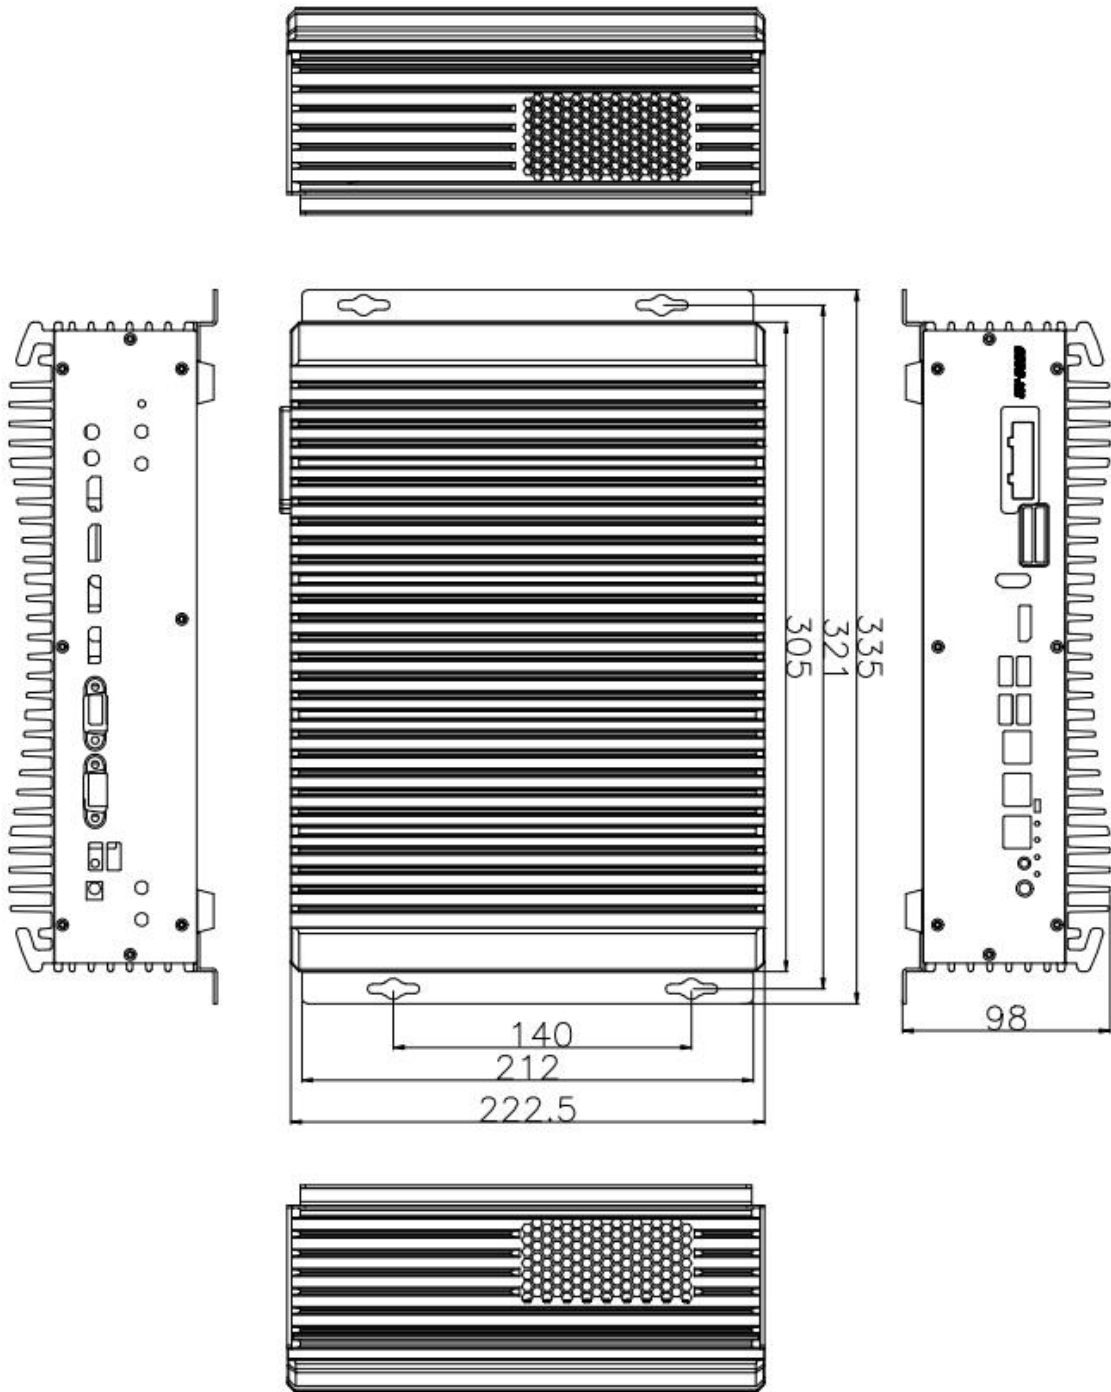

1.5. Part Number

Part Number	Model Name	Specification
	EAC-CC02-AC0	EAC-CC02-AC0准系统、ZRT-KC1117、220*230mm、Q170、3*LAN/4*COM/4*USB3.0+4*USB2.0/2*HDMI+4*DP+VGA/MXM GTX1050m 散热/T电源适配器/电源线-包装